



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup>:

H04B 3/00

A2

(11) International Publication Number:

WO 99/50969

(43) International Publication Date:

7 October 1999 (07.10.99)

(21) International Application Number: PCT/SE99/00468

(22) International Filing Date: 24 March 1999 (24.03.99)

(30) Priority Data:

09/049,384

27 March 1998 (27.03.98)

US

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON  
[SE/SE]; S-126 25 Stockholm (SE).(72) Inventor: FERTNER, Antoni; Kruthusbacken 76, 1 tr, S-169  
52 Solna (SE).(74) Agents: BERG, S., A. et al.; Albihns Patentbyrå Stockholm  
AB, P.O. Box 5581, S-114 85 Stockholm (SE).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


## Published

Without international search report and to be republished upon receipt of that report.

(54) Title: AN EQUALIZER FOR USE IN MULTICARRIER MODULATION SYSTEMS

## (57) Abstract

The present invention provides an optimal procedure for determining in the time domain equalizer coefficients for an equalizer, where the equalizer compensates for the effects of the communications channel on the transmitted signal. A unit pulse is transmitted over the communications channel, and a channel impulse response is estimated from the received signal. A cost function establishes a mean-square error associated with the estimated channel impulse response as compared to a desired impulse response signal. The value of the cost function varies based upon an offset value between the estimated channel impulse response and an equalized channel impulse response. Values of the cost function are determined for different offsets, and the offset that produces the smallest cost function value (corresponding to the minimum mean-square error) is selected. The optimal equalizer coefficients are then calculated using the selected offset and the established cost function. In a preferred embodiment, the invention is applied to multicarrier modulation systems. Moreover, the cost function is defined as a krakovian function that depends on the offset value. That krakovian function includes a first krakovian which uses the channel impulse response and a second krakovian which uses the autocorrelation of the channel impulse response. Using the first and second krakovians and the selected offset corresponding to the minimal value of the established cost function, the optimal equalizer coefficients are determined in a straightforward, one step calculation.

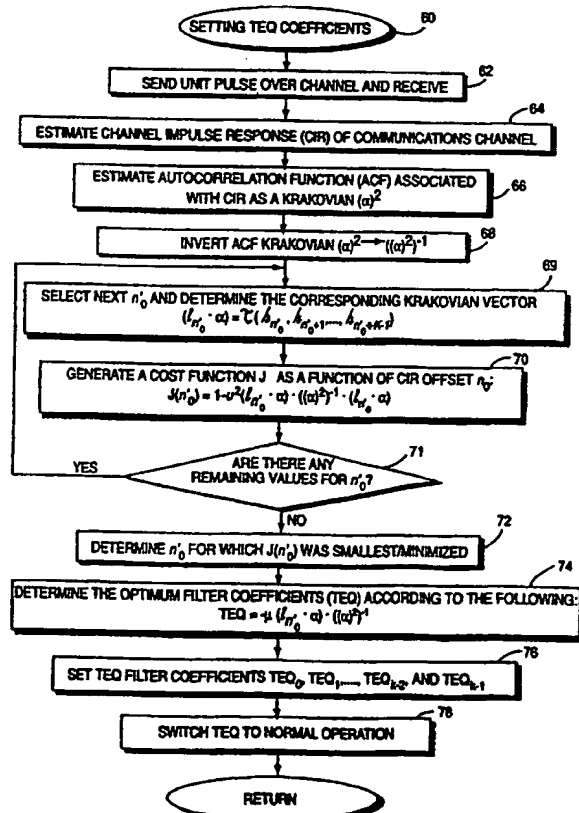

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## **AN EQUALIZER FOR USE IN MULTICARRIER MODULATION SYSTEMS**

### **FIELD OF THE INVENTION**

The present invention relates to equalization, and more particularly, for  
5 equalizers used in multicarrier modulation systems.

### **BACKGROUND AND SUMMARY OF THE INVENTION**

Asymmetric high speed Digital Subscriber Line (ADSL) and Very high  
speed Digital Subscriber Line (VDSL) are examples of modern communication systems  
which permit transmission of data over communication lines at very high rates, e.g., up  
10 to 52 Mbits/s. One example of a high speed data application is video on demand. The  
transmission of high-speed data over band-limited channels may be accomplished  
through the use of DMT-based, digital communications systems. DMT modems follow  
the general principle of transmitting data by dividing it into several interleaved bit  
streams, and using these bit streams to modulate several carriers.

15 A significant limitation in high data rate communication systems is  
intersymbol interference (ISI). One way to compensate for ISI in a DMT system is to  
add a cyclic prefix (guard time) to the beginning of each transmitted DMT symbol.  
Unfortunately, while increasing the length of prefixes reduces ISI, it also decreases the  
effective data rate. Another approach to combating ISI is to employ an equalizer at the  
20 receiver, but many equalizers require considerable and ongoing computation  
“overhead.” There is a need, therefore, to keep the cyclic prefix length as small as  
possible and still compensate for ISI using an equalization technique that does not  
require complicated and ongoing computations.

For purposes of this application, equalization is the process of correcting or compensating for the ISI caused by the communications channel. In practical communications, the frequency response of the channel is not known. Accordingly, an equalizer is designed using numerous parameters that must be adjusted on the basis of measurements of a channel's signal-affecting characteristics.

A transversal filter having a delay line with taps spaced by  $T$ -seconds (where  $T$  is the sampling interval and  $f_s = 1/T$  is the sampling rate at the receiver) is a common choice for an equalizer. The outputs of the filter taps are multiplied by a filter coefficient, summed, and fed to a decision device. The tap coefficients correspond to the channel parameters and represent to some extent a "model" of the channel. If the coefficients are properly selected, the equalizer significantly attenuates or practically removes the interference from symbols that are adjacent in time to the desired symbol. The selection of the coefficient values is typically based on minimization of either peak distortion or mean-squared distortion. The coefficients are selected so that the equalizer output is forced towards zero at  $N$  sample points on either side of the desired pulse.

There are two general types of automatic equalization. The first equalization approach transmits a training sequence that is compared at the receiver with a locally-generated or otherwise known training sequence. The differences between the two sequences are used to set the equalizer filter coefficients. In the second approach, commonly referred to as adaptive equalization, the coefficients are continually and automatically adjusted directly from the transmitted data. A drawback of adaptive equalization is its computational "cost" involved in continually updating the filter coefficients so that the channel model is adapted to the current conditions of the channel. Equalizer coefficient computational methods employing adaptive algorithms such as the least mean square (LMS) or recursive least square (RLS) are computationally expensive. At a very high sampling rate for high data rate

communications system, this kind of continual LMS updating of the equalizer filter coefficients is particularly expensive.

The present invention seeks to reduce both computational cost and cyclic extension, but at the same time effectively equalize received signals to compensate for ISI using a short length equalizer. For many communication applications, such as VDSL and ADSL, the communications channel does not change that much during a particular transmission. In this context of relative "constant" channel conditions, it is satisfactory to estimate the channel coefficients during an initial training sequence before the message is transmitted without thereafter adjusting the filter coefficient values during the transmission. Of course, it may be necessary to monitor channel quality during the transmission, and if channel quality decreases below a certain threshold, the equalizer coefficients could then be updated.

The present invention provides an optimal procedure for determining in the time domain equalizer coefficients for an equalizer, where the equalizer compensates received signals that are distorted by passing through the channel. A unit pulse is transmitted over the communications channel, and a channel impulse response is estimated from the received signal. A cost function establishes a mean-square error associated with the unequalized channel impulse response as compared to a desired impulse response signal. The value of the cost function varies based upon an offset value between the estimated channel impulse response and an equalized channel impulse response. Values of the cost function are determined for different offsets, and the offset that produces the smallest cost function value (corresponding to the minimum mean-square error) is selected. The optimal equalizer coefficients are then calculated using the selected offset and the established cost function.

In a preferred embodiment, the invention is applied to multicarrier modulation systems. Moreover, the cost function is defined as a krakovian function that depends on the offset value. That krakovian function includes a first krakovian which

uses the channel impulse response and a second krakovian which uses the autocorrelation of the channel impulse response. Using the first and second krakovians and the selected offset corresponding to the minimal value of the established cost function, the optimal equalizer coefficients are determined in a straightforward, one step calculation.

A better understanding of the features and advantages of the present invention will be obtained by reference to the following detailed description of the invention and the accompanying drawings which set forth an example embodiment in which the principles of the invention are utilized.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

Fig. 1 is a block diagram illustrating a basic prior art multicarrier transmitter, communication channel, and receiver;

Fig. 2 is a diagram conceptually illustrating frequency domain discrete multi-tone modulation (DMT);

Fig. 3 is a block diagram depicting the principle components of a DMT communications system in which the present invention may be advantageously employed;

Fig. 4 is a more detailed block diagram illustrating a time domain equalizer in accordance with the present invention;

Fig. 5 is a flowchart diagram illustrating procedures for setting the time domain equalizer coefficients in accordance with an example embodiment of the present invention;

Fig. 6 is a graph showing the normalized channel impulse response as well as the same channel impulse response after equalization in accordance with the present invention as a function of time/sample number;

Fig. 7 is a graph showing an enlarged portion of Fig. 6;

5 Fig. 8 is a graph illustrating the cost function ( $J$ ) in accordance with the present invention for various offset values ( $n'_0$ );

Fig. 9 is a graph showing the spectra of the communications channel and equalizer in accordance with the present invention, and the resulting spectrum; and

10 Fig. 10 is a graph showing signal-to-noise (SNR) ratios of an equalizer used in a DMT receiver in accordance with the present invention for various DMT cyclic extension values.

### **DETAILED DESCRIPTION OF THE INVENTION**

In the following description, for purposes of explanation and not limitation, specific details are set forth, such as particular modulation/demodulation techniques, applications, protocols, etc. in order to provide a thorough understanding of the present invention. For example, the present invention is described in the context of a multicarrier modulation digital communications system in which krakovian algebra is used to facilitate calculation of optimal equalizer coefficients. However, it will be apparent to one skilled in the art that the present invention may be practiced in other  
20 embodiments that depart from such specific details. In other instances, detailed descriptions of well-known methods, protocols, devices, and circuits are omitted so as not to obscure the description of the present invention with unnecessary detail.

### Multicarrier Modulation System

Fig. 1 shows an example Discrete Multitone (DMT) communication system in which the present invention may be employed. In a Discrete Multitone system, in general, the input bit stream is first serial-to-parallel converted. The parallel output is then grouped into  $N$  groups of bits corresponding to the number of bits per symbol. Portions of bits are allocated to each DMT carrier.

More specifically, transmitter 10 includes a serial-to-parallel converter 14, a multicarrier modulator 16, and a pretransmit processor 18. Receiver 12 includes a post channel processor 20, a multicarrier demodulator 22, and a parallel-to-serial converter 24. The transmitter and receiver are linked in this example by a digital subscriber line (DSL) or other form of communication channel 26. Serial input data at a rate of  $b_{total} / T_{symb}$  bits per second are grouped by converter 14 into blocks of  $b_{total}$  bits for each multicarrier symbol, with a symbol period of  $T_{symb}$ . The  $b_{total}$  bits in each multicarrier symbol are used to modulate  $N$  separate carriers in modulator 16 with  $b_i$  bits modulating the  $i$ -th carrier.

Preferably, an Inverse Discrete Fourier Transform (IDFT) is used as a DMT modulator to generate  $N_s$  time-domain samples of a transmit signal for each block of  $b_{total}$  bits, where  $N_s$  is preferably equal to twice the number of modulated carriers, i.e.,  $2N$ . The corresponding multicarrier demodulator performs a Discrete Fourier Transform (DFT), where  $b_i$  bits are recovered from the  $i$ -th sub-carrier. As depicted in Fig. 2, the carriers or subchannels in a DMT system are spaced  $1/T$  Hz apart across  $N/T$  Hz of the frequency band. More detailed discussion of the principles of multicarrier transmission and reception is given by J. A. C. Bingham in "Multicarrier Modulation for Data Transmission: An Idea Whose Time Has Come", *IEEE Communications Magazine*, Volume 28, Number 5, pp. 5-14, May 1990.



In a Discrete Multitone Modulation system,  $\{X_0, X_1, \dots, X_{N-1}\}$  are the original, complex, input data symbols,  $\{s_n\}$  is the modulated data sequence (before cyclic prefix),  $\{h_n\}$  is the discrete-time channel impulse response (CIR),  $\{\eta_n\}$  is an additive noise sequence,  $\{x_n\}$  is the received sequence. Adding the cyclic prefix is a discrete-time technique used to eliminate ISI in the DMT system. However, as described in the background, it is desirable to minimize the length of the prefix in order to maximize data throughput assuming the receiver equalizer can effectively remove or otherwise compensate for ISI. The independent modulating and demodulating vectors are the IDFT and the DFT given by the following general relationships:

$$X_k = \sum_{n=0}^{2N-1} x_n e^{-j2\pi kn/N} \quad k = 0, 1, \dots, 2N-1 \quad (1)$$

$$x_k = \frac{1}{2N} \sum_{k=0}^{2N-1} X_k e^{j2\pi kn/N} \quad n = 0, 1, \dots, 2N-1 \quad (2)$$

A DMT system with  $N$  channels for transmitting complex data requires a DFT size of  $2N$  because of forced Hermite symmetry in the frequency domain. The Hermite symmetry is necessary in order to obtain real-valued samples in the time domain. In a preferred embodiment, IDFT and DFT are implemented using IFFT and FFT algorithms using, for example, an approach disclosed in commonly-assigned "Method and Apparatus for Efficient Computation of Discrete Fourier Transform and Inverse Discrete Fourier Transform," U.S. patent application Serial No. 08/887,467, filed on July 2, 1997.

Fig. 3 is a block diagram showing the principal operative components of a basic DMT transmitter 30 and a basic DMT receiver 32 connected through a channel 34. Serial input data are grouped into blocks, converted to a parallel form, and appropriately encoded by an encoder 36. Each one of the  $N$  active subchannels contains

a number of  $b_k$  bits allocated to that subchannel. The total number of bits in a DMT symbol is therefore:

$$B_{total} = \sum_{k=1}^N b_k \quad (3)$$

Each of the  $N$  bit groups is mapped by the symbol into a two-dimensional signal constellation. The relation between the number of bits in each block of bits  $b_k$  and the necessary number of signal points in a constellation  $M$  is given by:

$$M_k = 2^{b_k} \quad (4)$$

The signal points in a constellation are typically arranged in a rectangular pattern for even values of  $b_k$  and a cross for odd values of  $b_k$ . Provided that the same signal energy is used for all constellations, the distance between neighboring signal points is reduced with increasing constellation size resulting in increased BER with the same signal-to-noise ratio (SNR).

The output from the encoder is  $N$  complex numbers, one for each group of bits, which are then fed to a device that calculates the Inverse Discrete Fourier Transform (IDFT). The output is a real sequence that can be considered the superimposing of  $N$  modulated orthogonal carriers spaced  $\Delta f$  apart,  $\Delta f = \frac{f_s}{N}$ .

The parallel IFFT output is converted back to a serial data stream by a converter 40. The digital modulated data stream is cyclically prefixed, converted to analog form by a digital-to-analog converter (DAC) 42, low-pass filtered at 44, and passed through a splitter filter and D.C. isolating transformer 46 during pre-transmit processing to produce an analog signal transmitted over a transmission channel 34.

At the receiver, the received analog signal is passed through a D.C. isolating transformer and low-pass filter 48, converted to digital form by an analog-to-

digital converter (ADC) 50, time domain pre-equalized by a finite impulse response (FIR) filter 52 to limit the effective memory of the channel, and stripped of the cyclic prefix during post-receive processing in converter 54. The resulting digital signals are demodulated by 2N FFT operation 56 and converted to parallel frequency domain  
5 signals. Since the amplitude vs. frequency and the delay vs. frequency responses of the channel are not necessarily constant across the entire frequency band, the received signal differs from the transmitted signal, and the parallel inputs to the frequency domain equalizer (FEQ) 58 differ from the parallel outputs from the encoder 36. It is the task of the FEQ 58 to compensate for these differences. The equalized signals can  
10 then be properly decoded and converted back to a serial form by the decoder 59. Ideally, the detected output serial data from the decoder 59 is the same as the input serial data to the encoder 36.

The preferred example embodiment of the present invention employs a Time Domain Equalizer (TEQ) 52 which shortens the overall channel impulse response  
15 and therefore reduces ISI. The present invention finds particular advantageous application in the training of the time domain equalizer 52. During a training mode of operation, a switch 51 is actuated (for example by a general data processor controlling the receiver) to connect the output of the analog-to-digital converter 50 to an equalizer filter coefficients processor 53 which calculates optimal TEQ coefficient values for a  
20 particular communications channel. Those optimal values are used to set the coefficients in equalizer 52. After training, the switch 51 is moved to directly connect the sampled output from the ADC to the equalizer 52 for operation in the normal equalization mode.

Fig. 4 illustrates the equalizer 52 in additional detail. In the training  
25 mode, the received sampled signal  $x_n$  is routed to the equalizer filter coefficients processor 53 for calculation of the filter coefficients  $TEQ_0, TEQ_1, \dots, TEQ_{K-2}$ , and  $TEQ_{K-1}$  in accordance with calculation procedures

described in detail below. The equalizer 52 is essentially a transversal filter corresponding to a delay line with  $z^{-1}$  symbol taps, where  $z^{-1}$  corresponds to a sampling interval  $T$ . The tapped signals are weighted or multiplied by a corresponding filter coefficient value TEQ in a corresponding multiplier. The multiplier products are summed and output as  $y_n$ . The filter coefficients, which can be expressed as a vector  $\mathbf{TEQ}_n$ , are set to minimize negative effects of interference from symbols that are adjacent in time to the desired symbol. In general, the criterion for selecting the TEQ coefficients is based on minimizing means-square error caused by such interference.

As described above, a multicarrier transmitter serial-to-parallel converts an input data stream to sub-symbols that are distributed to modulate carriers which are orthogonal on the symbol duration  $(2N + \nu)T$ , where  $T$  denotes the sampling interval. Assuming  $N$  sub-symbols distributed over  $2N$  carriers and imposing Hermitian symmetry, i.e.,  $X_k^m = (X_{2N-k}^m)^*$ , the transmitted sequence  $s_n$  in the time domain is given by:

$$s_n = \frac{1}{2N} \sum_{m=-\infty}^{\infty} \sum_{k=0}^{2N-1} X_k^m e^{2\pi j k \frac{n}{2N}} \quad (5)$$

where  $X_k^m$  is the sub-symbol conveyed by sub-carrier  $k$  during the  $m$ -th symbol, and the factor  $\frac{1}{2N}$  is introduced to normalize the overall transmission power.

The overall channel is considered to include the physical channel plus the filtering performed in the transmit and receive circuitry at both ends of the channel. The channel impulse response (CIR) is assumed to be linear. Denoting CIR by  $h(t)$ , and providing cyclic extension consisting of  $\nu$  samples, the received analog signal is given by:

$$\begin{aligned}
x(t) &= \frac{1}{2N} \sum_{m=-\infty}^{\infty} \sum_{k=0}^{2N-1} \sum_{n=-\nu}^{2N-1} X_k^m h(t - nT - m(2N + \nu)T) e^{2\pi j k \frac{n}{2N}} + \eta(t) \\
&= \frac{1}{2N} \sum_{m=-\infty}^{\infty} \sum_{k=0}^{2N-1} X_k^m \sum_{n=-\nu}^{2N-1} h(t - nT - m(2N + \nu)T) e^{2\pi j k \frac{n}{2N}} + \eta(t) \quad (6) \\
&= \frac{1}{2N} \sum_{m=-\infty}^{\infty} \sum_{n=-\nu}^{2N-1} h(t - nT - m(2N + \nu)T) \sum_{k=0}^{2N-1} X_k^m e^{2\pi j k \frac{n}{2N}} + \eta(t)
\end{aligned}$$

where  $\eta(t)$  is the additive white gaussian noise (AWGN) with one-sided spectral density  $N_0$ .

At the receiver, the cyclic prefix samples are discarded, and FFT  
 5 (demodulation) is performed on the  $2N$  real-valued samples. Inspecting equation (6), the innermost summation corresponds to the Fourier coefficient of the CIR associated with the sub-carrier  $k$ . Hence, after demodulation, each symbol only needs to be corrected by a complex coefficient associated with the channel transfer function that includes a phase shift and attenuation. Alternatively, this correction in the time domain  
 10 may be seen as convolution of the demodulated sequence with the composite channel impulse response.

As described earlier, the channel causes ISI which may severely  
 deteriorate system performance (e.g., poor symbol decisions). The dispersiveness of the  
 channel may be compensated for by adding guard time. For DMT systems, each  
 15 symbol is cyclically extended (the  $\nu$  last samples are repeated at the beginning of the block data) so that input sequence "looks" periodic. Again, the disadvantage of cyclic extension is reduced throughput efficiency which is proportional to the extension  
 length, i.e., by a factor  $\frac{2N}{2N + \nu}$ . For severe-ISI channels, throughput efficiency  
 becomes intolerably low. Increasing  $N$  or  $\nu$  increases computational complexity,  
 20 system delay, and memory requirements of the transceiver, and hence the cost of

transceiver increases quite significantly. This problem is solved in the present invention using a short-length, computationally "inexpensive" equalizer.

### **Mathematical Principles Used to Formulate the Equalizer**

The complete suppression of ISI requires that the equalized signal,  $y_n$ , be  
 5 identical to the transmitted sequence,  $s_n$ , up to an offset  $n_0$  (defined greater detail below):

$$y_n = \gamma \cdot s_{n-n_0} \quad (7)$$

where  $\gamma$  represents an arbitrary scaling factor. If the original sequence  $X_k$  to be  
 transmit is complex, it is reformatted as a Hermite symmetric sequence. To simplify the  
 10 notation, the index "m" which represents the symbol number is dropped. Thereafter, the  
 IDFT of the Hermite symmetric sequence is calculated, (which corresponds to  
 modulation), producing a real signal which is transmit over the channel. The received  
 signal is then demodulated using the DFT.

The equalizer in accordance with the invention is therefore designed to  
 15 determine a vector  $TEQ_n$  such that when  $TEQ_n$  operates on (or filters) the sampled  
 received signal,  $x_n$ , the result,  $y_n$ , is (to a great extent) a replica of the originally  
 transmitted sequence  $s_n$ , i.e.,

$$y_n = TEQ_n \otimes x_n \quad (8)$$

Substituting  $x_n$  using equation (6) results in:

$$20 \quad y_n = \frac{1}{2N} \sum_{m=-\infty}^{\infty} \sum_{n=-v}^{2N-1} TEQ_n \otimes h(t - nT - m(2N + v)T) \sum_{k=0}^{2N-1} X_k^m e^{2\pi j k \frac{n}{2N}} + \eta'_n \quad (9)$$

where  $\eta'$  is filtered external noise, and the symbol  $\otimes$  depicts convolution.

In order for the equalizer to perfectly suppress ISI, it must satisfy the following:

$$TEQ_n \otimes h_n = \gamma \cdot \delta(n - n_0) + \eta_n'' \quad (10)$$

5 where  $\eta_n''$  represents the deviation of the overall channel impulse response (CIR) from the desirable (ideal) unit pulse  $\delta(n)$ , i.e., the error due to imperfect equalization. The goal is to compensate the CIR ( $h_n$ ) so that  $\eta_n''$  is reduced to zero. Therefore, in the absence of noise and using an infinite length  $TEQ_n$ , it is theoretically possible to achieve complete suppression of ISI. But in practical applications, the equalizer is of  
10 finite length. Assuming an offset  $n'_0$  associated with unknown delay introduced by the channel  $n_0$ , channel model deviation (or channel misfit)  $\eta_n''$ , and external noise sources  $\eta_n'$ , the mean error may be minimized towards zero using the Least Squares principle.

Examining the limited number of equalizer coefficients  $TEQ_n$  necessary to minimize the error  $\eta_n''$ , assuming an originally transmit dirac pulse  $\delta(n)$ , we insert  
15 equation (9) into equation (10) and obtain:

$$\begin{aligned} y_n &= \frac{1}{2N} \sum_{m=-\infty}^{\infty} \sum_{n=-N}^{2N-1} (\gamma \cdot \delta(n - n_0) + \eta_n'') \sum_{k=0}^{2N-1} X_k^m e^{2\pi j k \frac{n}{2N}} + \eta_n' \\ &= \gamma \cdot s_{n-n_0} + \frac{1}{2N} \sum_{m=-\infty}^{\infty} \sum_{n=-N}^{2N-1} \eta_n'' \sum_{k=0}^{2N-1} X_k^m e^{2\pi j k \frac{n}{2N}} + \eta_n' \\ &= \gamma \cdot s_{n-n_0} + \eta_n''' + \eta_n' \end{aligned} \quad (11)$$

where  $\eta_n'''$  depicts the noise sequence due to the imperfectly equalized channel.

The filtering operation, as described by equation (9), involves the convolution of an infinitely long sequence with a finite one. Using krakovian algebraic notation, equation (10) may be rewritten as the following:

$$\begin{Bmatrix} TEQ_0 \\ \vdots \\ TEQ_{K-1} \end{Bmatrix} \begin{Bmatrix} h_{m1} & \dots & h_0 & \dots & h_{m2} \\ \vdots & & \vdots & & \vdots \\ h_{m1-(K-1)} & \dots & h_{K-1} & \dots & h_{m2-(K-1)} \end{Bmatrix} = \gamma \cdot \begin{Bmatrix} 0 \\ \vdots \\ 1 \\ \vdots \\ 0 \end{Bmatrix} + \begin{Bmatrix} \varepsilon_{m1} \\ \vdots \\ \varepsilon_{n_0} \\ \vdots \\ \varepsilon_{m2} \end{Bmatrix} \quad (12)$$

- 5 where: indices  $m1 \rightarrow -n_0$  and  $m2 \rightarrow \infty$ ,  $h_0$  represents a first maximum amplitude of the sampled CIR (before equalization),  $\gamma \cdot \tau\{0, \dots, 0, 1, 0, \dots, 0\}$  represents the desired CIR, and  $\varepsilon_k$  is error sequence comprising both filtered external noise and noise due to imperfect channel equalization referred to hereafter as an observation error  $\varepsilon$ .

- The following is a brief and basic description of krakovian algebra. A  
 10 krakovian is defined as a set of elements (numbers, symbols, or other krakovians) arranged in rectangular array of  $m$  columns and  $n$  rows so that the krakovian has a dimension  $m \times n$ . The elements of a krakovian are indexed according to their position, namely by column and row number. krakovian algebra is not the same as matrix algebra. In fact, some of the different properties of krakovians, not found in regular  
 15 matrix algebra, are employed in the preferred embodiment to achieve a significant reduction in data processing overhead.

- In krakovian algebra, the product of two krakovian factors  $a$  and  $b$  when it consists of accumulated cross-products of the columns of krakovians  $a$  and  $b$ . The product element is written in the product column having the same column number as the  
 20 first factor  $a$  and in the product row having the same number as the column of the second factor  $b$ :



$$p_{ij} = \sum_{k=1}^n a_{ik} b_{jk} \quad (13)$$

Thus, krakovian multiplication requires the same number of rows. If the product  $a \cdot b$  exists, then the product  $b \cdot a$  always exists and is equal to the transpose of  $a \cdot b$ . This definition leads to a laws of commutation and association that are different from the  
 5 commonly known matrix laws.

A special krakovian, referred to as the diagonal krakovian, includes all "1's" on the *NW-SE* diagonal and "0's" in every other location and is depicted by the Greek letter  $\tau$ . When the krakovian  $\tau$  occurs as a second multiplicand, it plays a similar role in the krakovian algebra as does unity in the arithmetic of ordinary  
 10 numbers. However, a krakovian  $\tau$  as the first multiplicand causes a krakovian transpose. These statements may be expressed as follows:

$$a \cdot \tau = a \quad (14)$$

$$\tau \cdot a = \tau a \quad (15)$$

where the transpose of a krakovian means as it does in regular matrix algebra:

$$(\tau a)_{ij} = a_{ji} \quad (16)$$

Changes in the order of multiplying krakovians follow certain rules. The krakovian association law states:

$$a \cdot b \cdot c \cdot d \cdot e \cdot f = a \cdot (e \cdot \tau d \cdot \tau c \cdot \tau b) \cdot f \quad (17)$$

The krakovian law of dissociation is

$$a \cdot (b \cdot c \cdot d \cdot e) \cdot f = a \cdot \tau e \cdot \tau d \cdot \tau c \cdot b \cdot f \quad (18)$$

Krakovians do not fulfill certain matrix algebra relationships, e.g.,

$$(a \cdot b) \cdot c \neq a \cdot (b \cdot c) \quad (19)$$

With this very brief explanation of krakovian algebra, we return to the derivation of the optimal equalizer filter coefficients. Equation (12) may be rewritten in more compact form in krakovian notation

$$\mathbf{TEQ}_n \cdot \tau \alpha = l + \varepsilon \quad (20)$$

where  $\mathbf{TEQ}_n$  is a vector containing coefficients  $TEQ_0 \dots TEQ_{K-1}$  of the time domain equalizer 52,  $\alpha$  is a krakovian containing samples of the received channel impulse response (CIR),  $l$  is a krakovian vector showing a "best" sample location for the received unit pulse,  $\varepsilon$  is a vector representing the observation error, and  $\tau$  denotes 10 transpose. The degree of the  $\mathbf{TEQ}_n$  satisfies  $K \leq n_0 + m2$  since equation (12) represents an over-determined system. Hereafter, a description of krakovian dimensions is omitted when clear from the context.

The krakovian vector  $l$  on the right side of the equation (20) is purposefully configured to have only one non-zero element at the offset position  $n'_0$ , 15 where  $-n_0 < n'_0 \leq m2$ . Vector  $l$  will be referred to as the "coordinate vector" because of a physical interpretation as the delay introduced by a communication channel. The offset  $n'_0$  is the sampling time difference between the first maximum peak of the CIR and the peak of the equalized CIR. As is shown below, the choice of the offset  $n'_0$  affects minimum mean-square-error. Hence,  $n'_0$  must be selected to minimize the mean 20 square error.

The mean square error may be viewed as all of the output energy except for the energy transmitted in position  $n'_0$ , and is established as a cost function  $J(n'_0)$  corresponding to the square of the observation error.

$$J(n'_0) = \left\{ (TEQ_n \otimes h_n) - \gamma \cdot \delta(n - n'_0) \right\}^2 \quad (21)$$

The cost  $J$  is calculated at multiple offsets  $n'_0$ . The optimal coefficient vector  $TEQ_n$ , (i.e., the optimal filter coefficients), may be obtained when the cost function  $J(n'_0)$  reaches a minimum. If the solution of equation (21) exists in a mean-square sense, the  
 5 krakovian  $\alpha$  containing the sampled CIR,  $h_k$ , must fulfill the following constraint.

The square of  $\alpha$  must be "positive definite" which means that  $(\alpha)^2$  must be capable of being inverted.

The following assumptions and manipulations, using krakovian algebra, are useful in efficiently solving equation (21) for minimum mean-square error.

10 Equation (20) may be expressed using krakovian notation as:

$$TEQ' \cdot \tau\alpha' = \varepsilon \quad (22)$$

where  $TEQ' = \tau\{TEQ_n \quad u\}$ ,  $u = -1$ , and  $\alpha' = \{\alpha \quad l_{n'_0}\}$ . This assumption permits squaring of both sides since equation (22) provides the error in a "pure" form which permits easy calculation of the cost function  $J$

$$15 \quad J = (TEQ' \cdot \tau\alpha')^2 = \varepsilon^2 \quad (23)$$

Equation (23) may be manipulated using krakovian algebra, resulting in the following:

$$\varepsilon^2 = (TEQ' \cdot \tau\alpha')^2 = TEQ' \cdot (\alpha')^2 \cdot TEQ' = (TEQ' \cdot \tau r'')^2 \quad (24)$$

Given that the krakovian  $\alpha$  corresponds to the CIR, the krakovian  $(\alpha)^2$  corresponds to the autocorrelation (AC) of the CIR. As is well known, the autocorrelation function  
 20 and power spectral density are Fourier transform pairs. The receiver demodulator in a DMT system can be used to generate the autocorrelation of the CIR.

Taking the square root of equation (24) results in

$$\mathbf{TEQ}' \cdot \mathbf{r}'' = \tau \{w_0 \dots w_{k-1} w_K\} \quad (25)$$

Recall that the goal is to minimize the square error which can now be expressed as

$$\varepsilon^2 = \sum_{k=0}^K w_k^2 = \text{minimum} \quad (26)$$

5 The Krakovian root  $\mathbf{r}''$  has the structure given by the following notation:

$$\mathbf{r}'' = \begin{Bmatrix} \mathbf{r} & \boldsymbol{\rho} \\ 0 & w \end{Bmatrix} \quad (27)$$

where  $\mathbf{r}$  is the upper triangle with positive diagonal entries, 0 depicts zeros below the main diagonal, and  $\tau \{ \boldsymbol{\rho} \ w \}$  is the last column of  $\mathbf{r}''$ . Using the above notation, we obtain from equation (25)

$$10 \quad \mathbf{TEQ}_n \cdot \mathbf{r} + u\boldsymbol{\rho} = \tau \{w_0 \dots w_{K-1}\} \quad (28)$$

$$w = w_K \quad (29)$$

Equation (28) always has a solution irrespective of the choice of  $w_0, \dots, w_{K-1}$ .

However, the minimum of mean-square-error expressed in equation (26) is achieved when

$$15 \quad w_0 = \dots = w_{K-1} = 0 \quad (30)$$

In other words,  $w^2$  is the least possible value of  $\varepsilon^2$ , where  $\varepsilon^2$  is equal to the cost function  $J(n'_0)$  for a particular coordinate vector  $\mathbf{l}_{n'_0}$  which can be expressed as:

$$\min(\varepsilon^2) = w^2 = J(n'_0) \quad (31)$$

Using these properties, the sum of squared observational errors is calculated without the use of an adaptive algorithm like the gradient search algorithm. Instead, a purely algebraic procedure is employed thereby circumventing the difficulties associated with the existence of local minima, and achieving the optimal solution in a  
 5 finite number of steps corresponding to the number of choices of  $n'_0$ .

Equation (24) yields

$$(\alpha')^2 = (r'')^2 \quad (32)$$

Combining equation (22) and equation (27) with equation (32) results in

$$(r)^2 = (\alpha)^2 \quad (33)$$

$$10 \quad \rho \cdot r = l_{n'_0} \cdot \alpha \quad (34)$$

$$w^2 = (l_{n'_0})^2 - (\rho)^2 = 1 - (\rho)^2 \quad (35)$$

Substituting equations (34) and (30) into equation (28) and using equation (33), we obtain a formula for determining the optimum value of the vector  $\mathbf{TEQ}_n$ :

$$\mathbf{TEQ}_n = -u(l_{n'_0} \cdot \alpha) \cdot ((\alpha)^2)^{-1} \quad (36)$$

15 The term  $(l_{n'_0} \cdot \alpha)$  corresponds to the  $n'_0$ -th column of the krakovian  $\alpha$ , and the inverted krakovian  $((\alpha)^2)^{-1}$  may be physically interpreted as the inverse of a krakovian consisting of the autocorrelation sequence of the channel impulse response.

From equation (36), the corresponding value of the cost function  $J(n'_0)$  can then be expressed as:

$$J(n'_0) = 1 + u \mathbf{TEQ}_n \cdot (l_{n'_0} \cdot \alpha) \quad (37)$$

or equivalently

$$J(n'_0) = 1 - u^2 (l_{n'_0} \cdot \alpha) \cdot ((\alpha)^2)^{-1} \cdot (l_{n'_0} \cdot \alpha) \quad (38)$$

In this form, the cost function  $J(n'_0)$  may be computed and its minimum determined  
 5 without any knowledge of the equalizer filter coefficients  $\mathbf{TEQ}_n$ . Since determining  
 the optimum equalizer coefficients  $\mathbf{TEQ}_n$  is the end goal, the traditional "fitting"  
 procedure is reversed in the present invention. Instead of searching for the minimum  
 mean-square-error by adaptively adjusting filter coefficients, (e.g., using recursive  
 LMS), the optimum equalizer coefficients are, determined in a single step as described  
 10 below after the search for minimum mean-square-error is accomplished using  
 equation (38).

To determine the minimum mean-square error, the cost function  $J(n'_0)$  in  
 equation (38) is determined for discrete choices of offset  $n'_0$  position. A good initial  
 guess about the region of search for the minimum of cost function can be obtained by  
 15 the analysis of available communication channels. This cost function determination  
 procedure is purely algebraic and discrete, therefore the cost function need not be  
 differentiable. In fact, the cost function  $J(n'_0)$  is non-differentiable in respect to the  
 offset  $n'_0$ . Thus, the only necessary assumption is the non-singularity of the inverse  
 krakovian  $((\alpha)^2)^{-1}$ . The optimum short-length equalizer coefficients  $\mathbf{TEQ}_n$  may be  
 20 determined in a single step from equation (36) using the column vector  $l_{n'_0} \cdot \alpha$  obtained  
 in equation (38) for which the minimum value of  $J(n'_0)$  was obtained in equation (36),  
 keeping in mind the krakovian  $(\alpha^2)^{-1}$  is a constant.

### Equalizer Coefficient Setting Procedure

Having demonstrated the underlying mathematical principles of the present invention, a routine (block 60) for determining the optimal equalizer coefficients in accordance with an example implementation of the invention is now described in conjunction with the flowchart in Fig. 5. Switch 51 is connected to the equalizer filter coefficients processor 53 when training the equalizer 52. A unit or dirac pulse is transmitted over the channel and received in the receiver (block 62). The equalizer filter coefficients processor 53 processes the received samples  $x_n$  and estimates a channel impulse response (CIR) of the communications channel (block 64).  
 5 Using the channel impulse response, the equalizer filter coefficients processor 53 estimates the autocorrelation function (ACF) associated with the just-estimated channel impulse response as a krakovian  $(\alpha)^2$  (block 66). The autocorrelation function krakovian is then inverted taking advantage of the Toeplitz structure of the krakovian  $(\alpha)^2$  to generate  $((\alpha)^2)^{-1}$  (block 68). Using the estimate of the CIR, the following  
 10 krakovian vector is formed:  $(l_{n_0} \cdot \alpha) = \tau(h_{n_0+1}, \dots, h_{n_0+1}, \dots, h_{n_0+K-1})$  (block 69).

The next task is to calculate the cost function  $J$  as a function of the channel impulse response offset  $n'_0$  using equation (38) (block 70). Various channel impulse response offset values are inserted into block 69 in order to determine that offset  $n'_0$  for which the cost function  $J(n'_0)$  is the smallest, i.e., minimum mean-square  
 20 error (block 72). The optimum equalizer filter coefficients  $TEQ_n$  are then determined using equation (36) (block 74). Once calculated, the equalizer filter coefficients processor 53 then sets the equalizer filter coefficients  $TEQ_0, TEQ_1, \dots, TEQ_{K-2}$ , and  $TEQ_{K-1}$  to the calculated optimal values (block 76). After the coefficients are set, switch 51 is then moved to the normal position, and the equalizer 52 processes received

signal samples  $x_n$  using the set *TEQ* filter coefficients. Equalizer output samples  $y_n$  are then compensated for the channel-induced ISI (block 78).

### **Performance of an Equalizer Implemented Using the Invention**

Figs. 6-9 are now described to illustrate the performance of an example implementation of the present invention by way of simulated tests. A one kilometer telephone loop was chosen as an example communications channel. A unit impulse was transmitted over that telephone loop. Fig. 6 graphs normalized amplitude on the vertical axis versus time (indicated as received sample number) on the horizontal axis. The channel impulse response (CIR) received corresponding to the transmitted unit pulse is shown as an oscillating waveform (indicated as a dashed line) having multiple "pulses" which obviously adversely interferes with adjacent symbols. In contrast, the same channel impulse response after equalization (shown as a solid line) includes only one very narrow spike shortly after the first maximum pulse of the unequalized channel impulse response. Accordingly, the equalized channel impulse response resembles very much the originally transmitted unit pulse with minimal overlap onto adjacent symbols.

Fig. 7 enlarges the portion of the graph in Fig. 6 around the first maximum of the CIR from a reference chosen at sample zero. It is easy to see that the channel impulse response offset  $n'_0$ , defined as the offset between the first maximum of the channel impulse response and the point at which the cost function  $J(n'_0)$  is minimized, corresponds to one sampling interval.

Fig. 8 illustrates this point somewhat differently by graphing the cost function  $J(n'_0)$  on the vertical axis as a function of the offset  $n'_0$ . The first maximum of the unequalized channel response is at time sample zero. By substituting different offset  $n'_0$  values, e.g., -3, -2, 1, 2, 3, etc., and calculating the cost function, the graph in



Fig. 8 clearly shows that the minimum cost function value is at an offset  $n'_0$  equal to one sample time from sample zero.

Fig. 9 illustrates the overall performance of this example equalizer. The spectrum of the one kilometer telephone loop channel is illustrated as the dashed dot line. The equalizer's spectrum, is shown as the dashed line and substantially mirrors the spectrum, of the communications channel. The resulting spectrum equalized in accordance with the present invention (shown as a solid line) is for the most part flat which corresponds to optimal equalization.

Comparing the original channel impulse response with the equalized channel impulse response, it is clear that the present invention offers a substantially improved signal-to-noise ratio performance with respect to intersymbol interference. Fig. 10 illustrates, for this example in a DMT environment, SNR performance in the frequency domain due to the uncanceled, oscillating "tail" of the channel impulse response, (which causes intersymbol interference), for various length DMT cyclic extensions. As is evident from Fig. 10, there is no dramatic difference in SNR even though different cyclic extension length values are used (64, 32, and 16). Accordingly, using the present invention, shorter cyclic extensions may be used resulting in greater throughput efficiency.

Optimal equalization is achieved in the present invention using a short length, non-recursive equalizer that has a number of advantages over gradient-based, recursive equalizer algorithms. One well known drawback of gradient, recursive algorithms is their susceptibility to local minima. The present invention avoids this problem using the algebraic principle of minimizing means square error. Instead of differentiating the cost function, the cost function's value is explicitly monitored for discrete choices of the channel impulse response offset vector until a minimum is found. Thereafter, the optimum equalizer coefficients of a short length equalizer are readily calculated in non-recursive fashion and with relatively small computation cost.

While the invention has been described in connection with practical and preferred embodiments, it is to be understood that the invention is not to be limited to the disclosed embodiments, but on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the  
5 appended claims.

**WHAT IS CLAIMED IS:**

1. In a receiver that receives signals transmitted over a communications channel where the received signals are compensated in an equalizer for effects of the communications channel on the transmitted signal, a method, comprising the steps of:

5       estimating a channel impulse response for the communications channel;  
      estimating an autocorrelation function associated with the channel impulse response; and

      calculating coefficients for the equalizer from the estimated channel impulse response and the estimated autocorrelation function.

10       2. The method in claim 1, further comprising:

      determining an error associated with imperfect equalization;  
      determining a cost function associated with the error; and  
      calculating the equalizer coefficients using the determined cost function.

15       3. The method in claim 2, wherein the cost function defines a square error associated with an equalized version of the channel impulse response compared to a desired channel impulse response.

      4. The method in claim 3, wherein a value of the cost function varies depending on an offset of the estimated channel impulse response and the equalized version of the channel impulse response.

20       5. The method in claim 4, further comprising:

      determining the value of the cost function for different offsets, and  
      selecting the offset that produces the smallest cost function value,  
      wherein the equalizer coefficients are calculated using the selected offset.

6. The method in claim 1, wherein the channel impulse response and autocorrelation are determined using an initial training signal including a unit pulse transmitted over the communications to the receiver.

7. The method in claim 1, wherein the calculating step employs krakovian algebraic relationships.

8. A receiver that receives signals transmitted over a communications channel comprising:

an equalizer that compensates the received signal for effects of the communications channel on the transmitted signal; and

10 a processor that determines parameters of the equalizer associated with the communications channel based on krakovian algebra.

9. The receiver in claim 8, wherein the equalizer is a equalizer implemented as a finite impulse response (FIR) transversal filter having multiple taps and corresponding equalizer coefficients.

15 10. The receiver in claim 9, wherein the equalizer includes a training mode, during which optimal equalizer coefficients are calculated and set by the processor, and a normal operation mode, during which the set coefficients are used to weight the signals at the corresponding filter tap, the weighted signals being summed to produce an equalized signal.

20 11. The receiver in claim 9, wherein the receiver is a discrete multi-tone (DMT) receiver.

12. The receiver in claim 9, wherein the processor defines a first krakovian using a channel impulse response of the communications channel, defines a second krakovian using an autocorrelation function associated with the channel impulse

response, and calculates the optimal equalizer coefficients using the first and second krakovians.

13. The receiver in claim 12, wherein the processor inverts the second krakovian to calculate the optimal equalizer coefficients.

5 14. The receiver in claim 9, wherein the processor determines a squared error between the estimated channel impulse response and a desired impulse response and calculates the equalizer coefficients minimizing the squared error.

15. The receiver in claim 14, wherein a value of the squared error varies depending on an offset of the estimated channel impulse response and an equalized  
10 version of the channel impulse response.

16. The receiver in claim 15, wherein the processor determines the value of the squared error for different offsets, selects the offset that produces the smallest squared error value, and calculates the equalizer coefficients using the selected offset.

17. An equalization method for equalizing received signals transmitted over a  
15 communications channel for the duration of a transmission using equalization parameters, comprising the steps of:

estimating a channel impulse response of the communications channel using a known signal transmitted in the initial portion of the transmission;

determining an offset value between the estimated channel impulse response and  
20 an equalized channel impulse response; and

determining the equalization parameters using the determined offset value.

18. The method in claim 17, further comprising:

manipulating the channel impulse response to determine a corresponding autocorrelation function;

25 assembling the autocorrelation function as a krakovian;

inverting the krakovian;  
 determining optimal values for the channel model parameters using the inverted  
 krakovian.

19. The method in claim 17, wherein the equalization method is employed in  
 5 a multicarrier transmission system and the manipulating step includes:

taking the Fourier transform of the received channel impulse response, squaring  
 the magnitude of the Fourier transform result, and taking the inverse Fourier transform  
 of the squared magnitude to compute the autocorrelation function.

20. The method in claim 17, wherein the channel model parameters include  
 10 equalization coefficients, the method further comprising:

determining a cost function J according to the following:

$$J\{(TEQ_n \otimes h_n) - \gamma \delta(n - n_0)\}^2$$


where  $TEQ_n$  corresponds to the equalization coefficients,  $h_n$  depicts the channel  
 impulse response,  $\otimes$  corresponds to convolution,  $\gamma$  is a scaling factor, and  $\delta(n - n_0)$   
 15 corresponds to a unit pulse.

21. The method in claim 20, wherein the cost function J is formulated as a  
 krakovian function that depends on the offset value including a first krakovian  
 associated with the channel impulse response and a second krakovian associated with  
 the autocorrelation function.

22. The method in claim 21, further comprising:  
 solving the krakovian function for different offset values in order to determine  
 the minimal cost function, and

determining the equalization coefficients  $TEQ_n$  using the offset value that  
 produced the minimal cost function.

Fig. 1

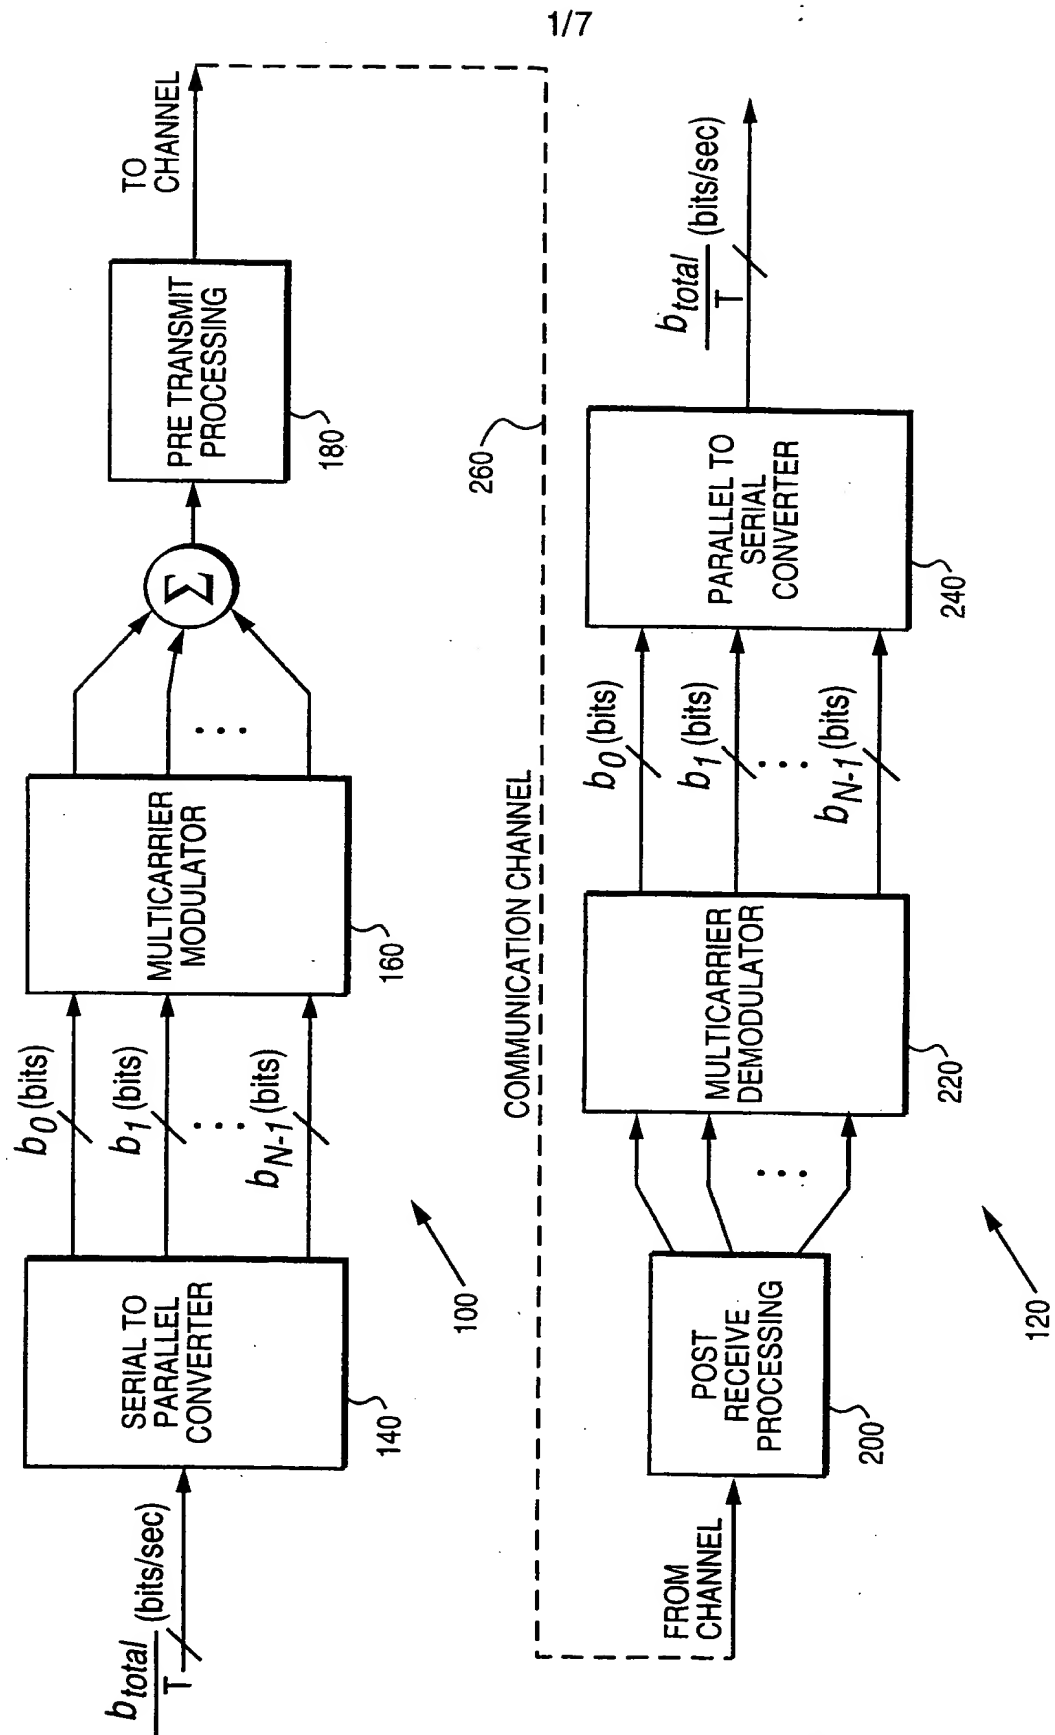

2/7




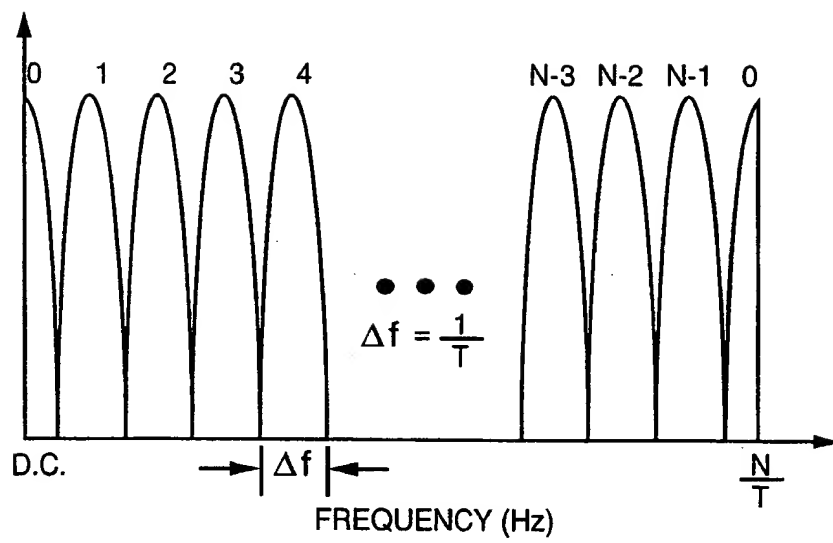
*Fig. 2*



Fig. 3

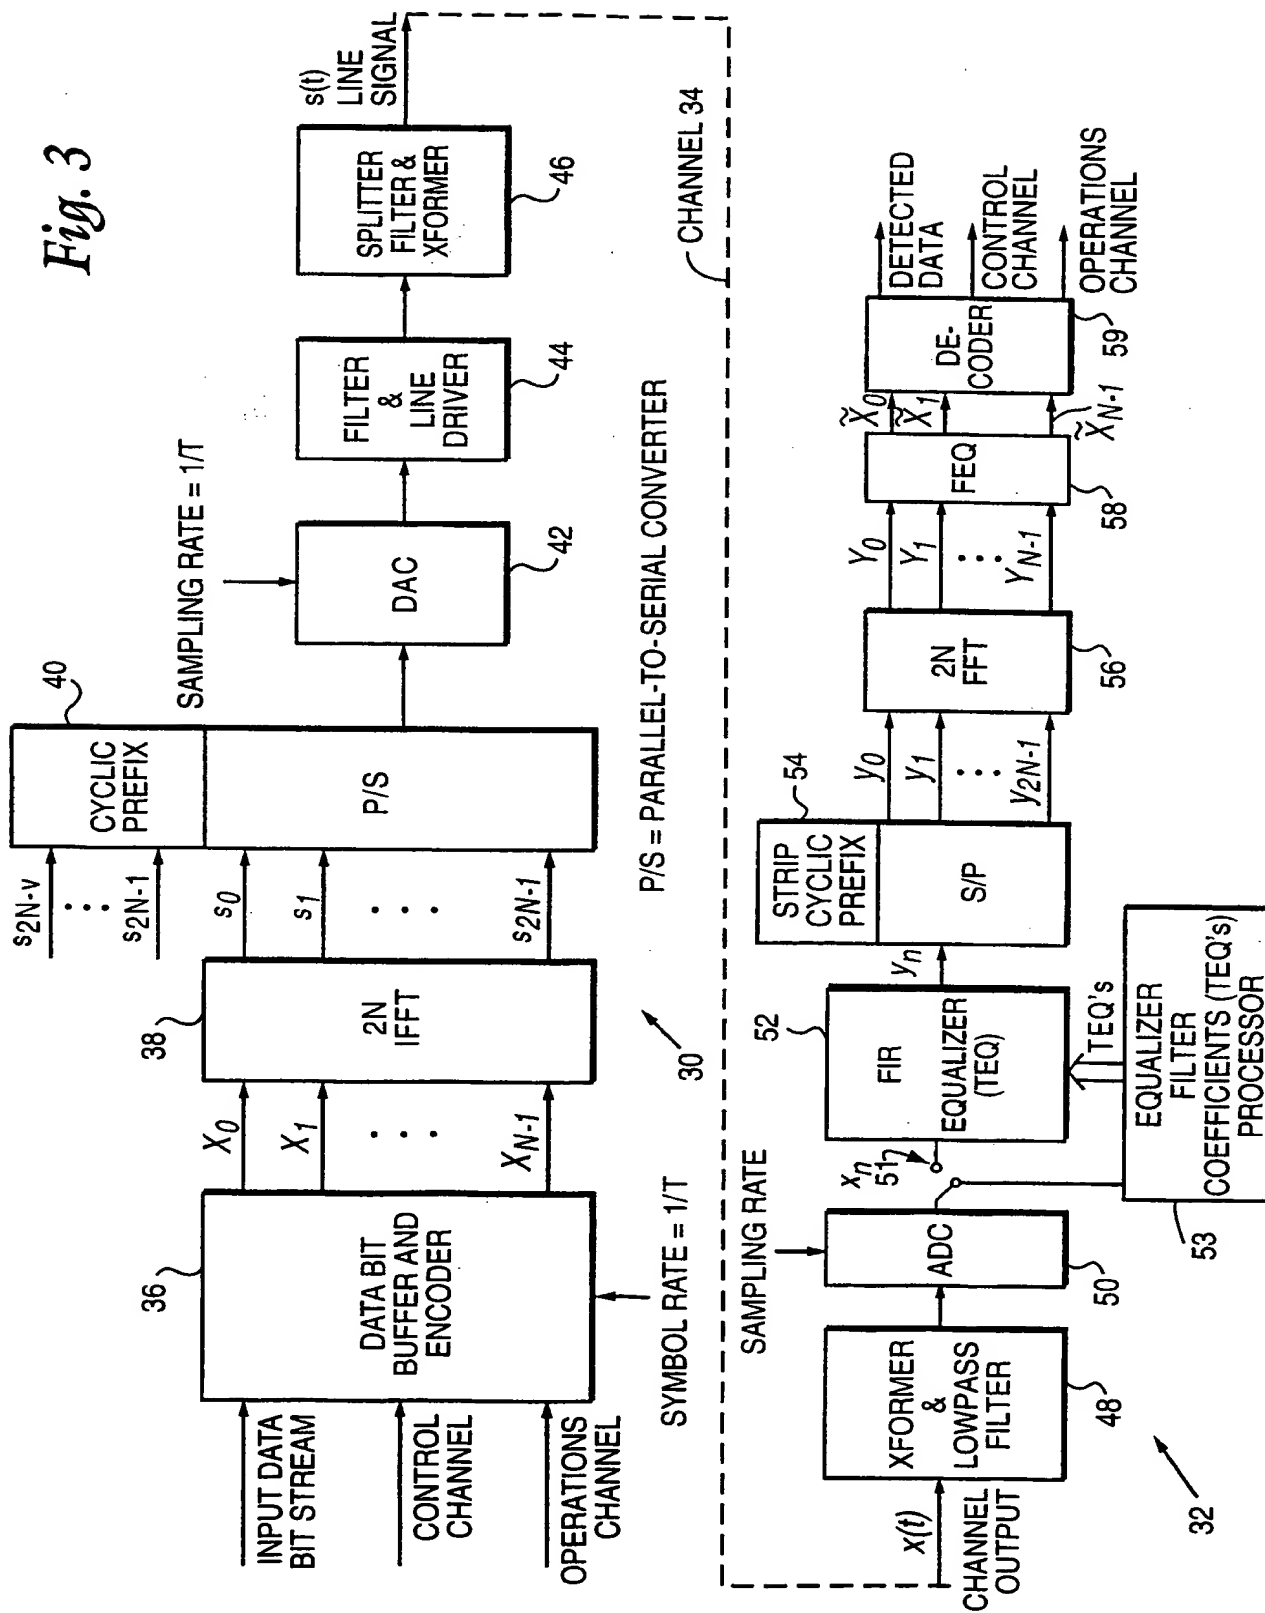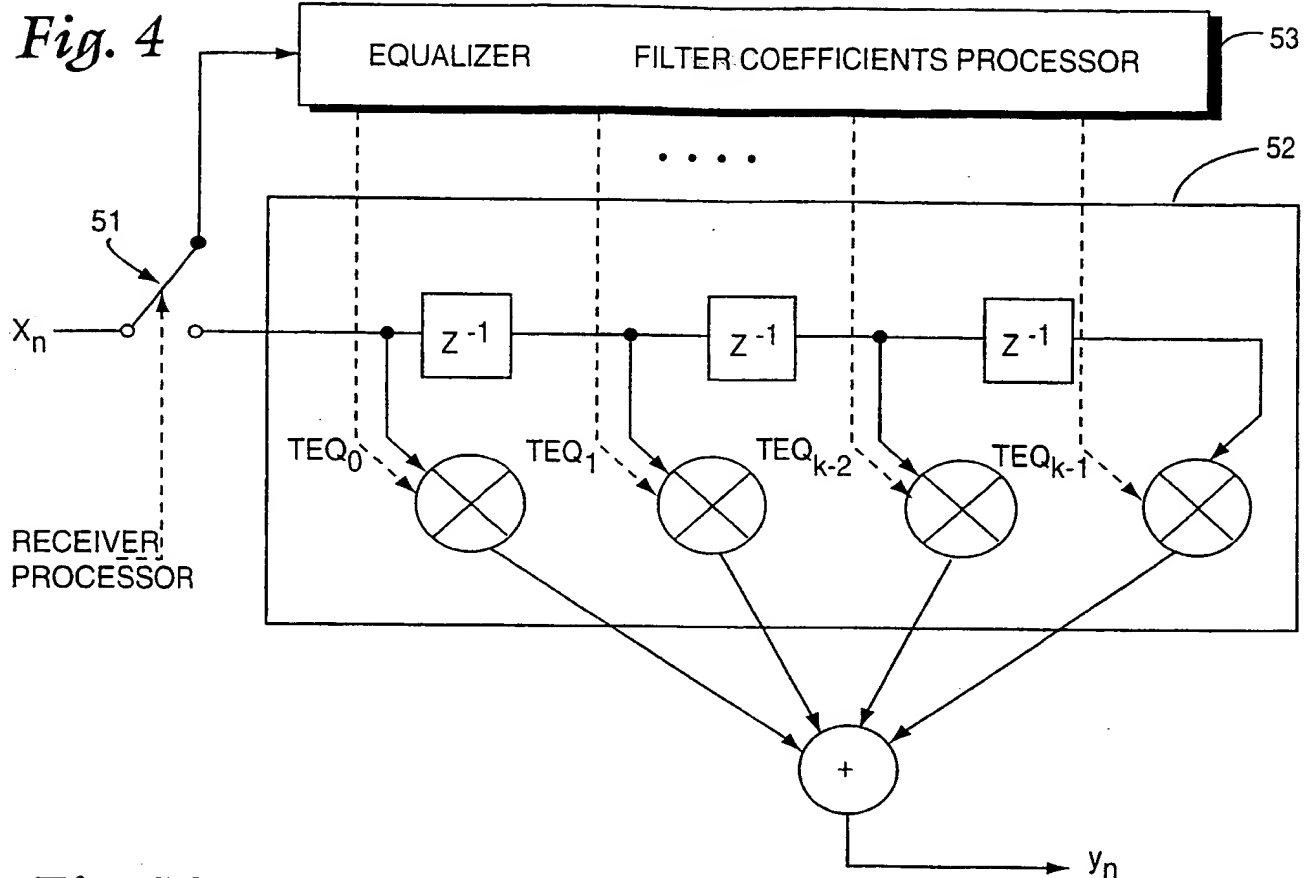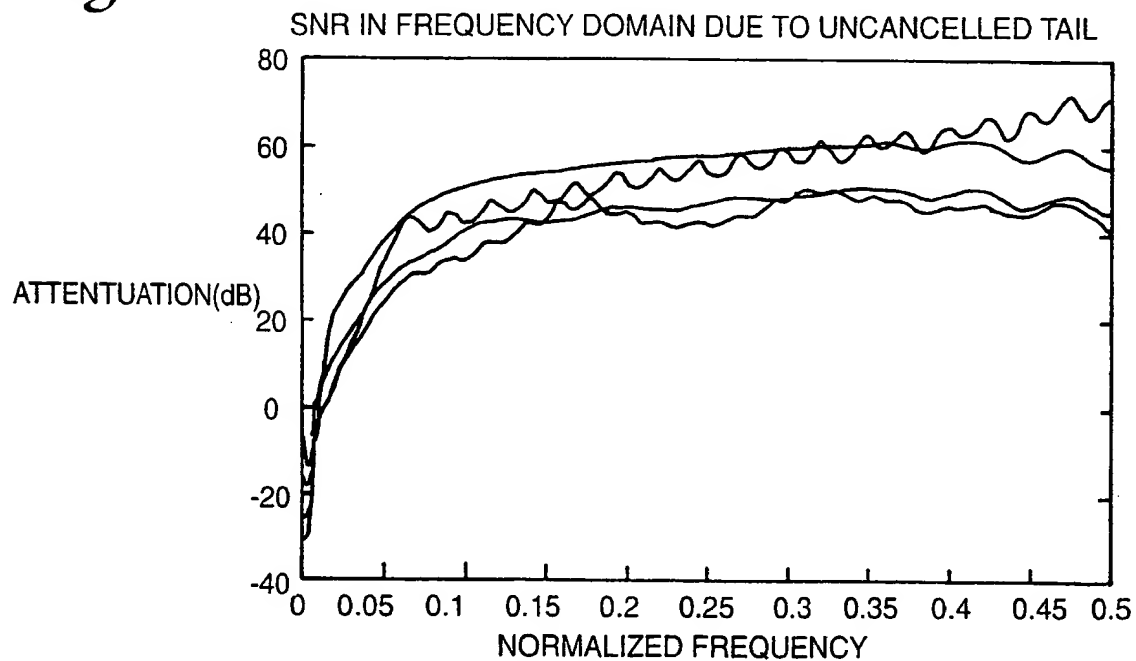


4/7



**Fig. 10**

5/7



Fig. 5

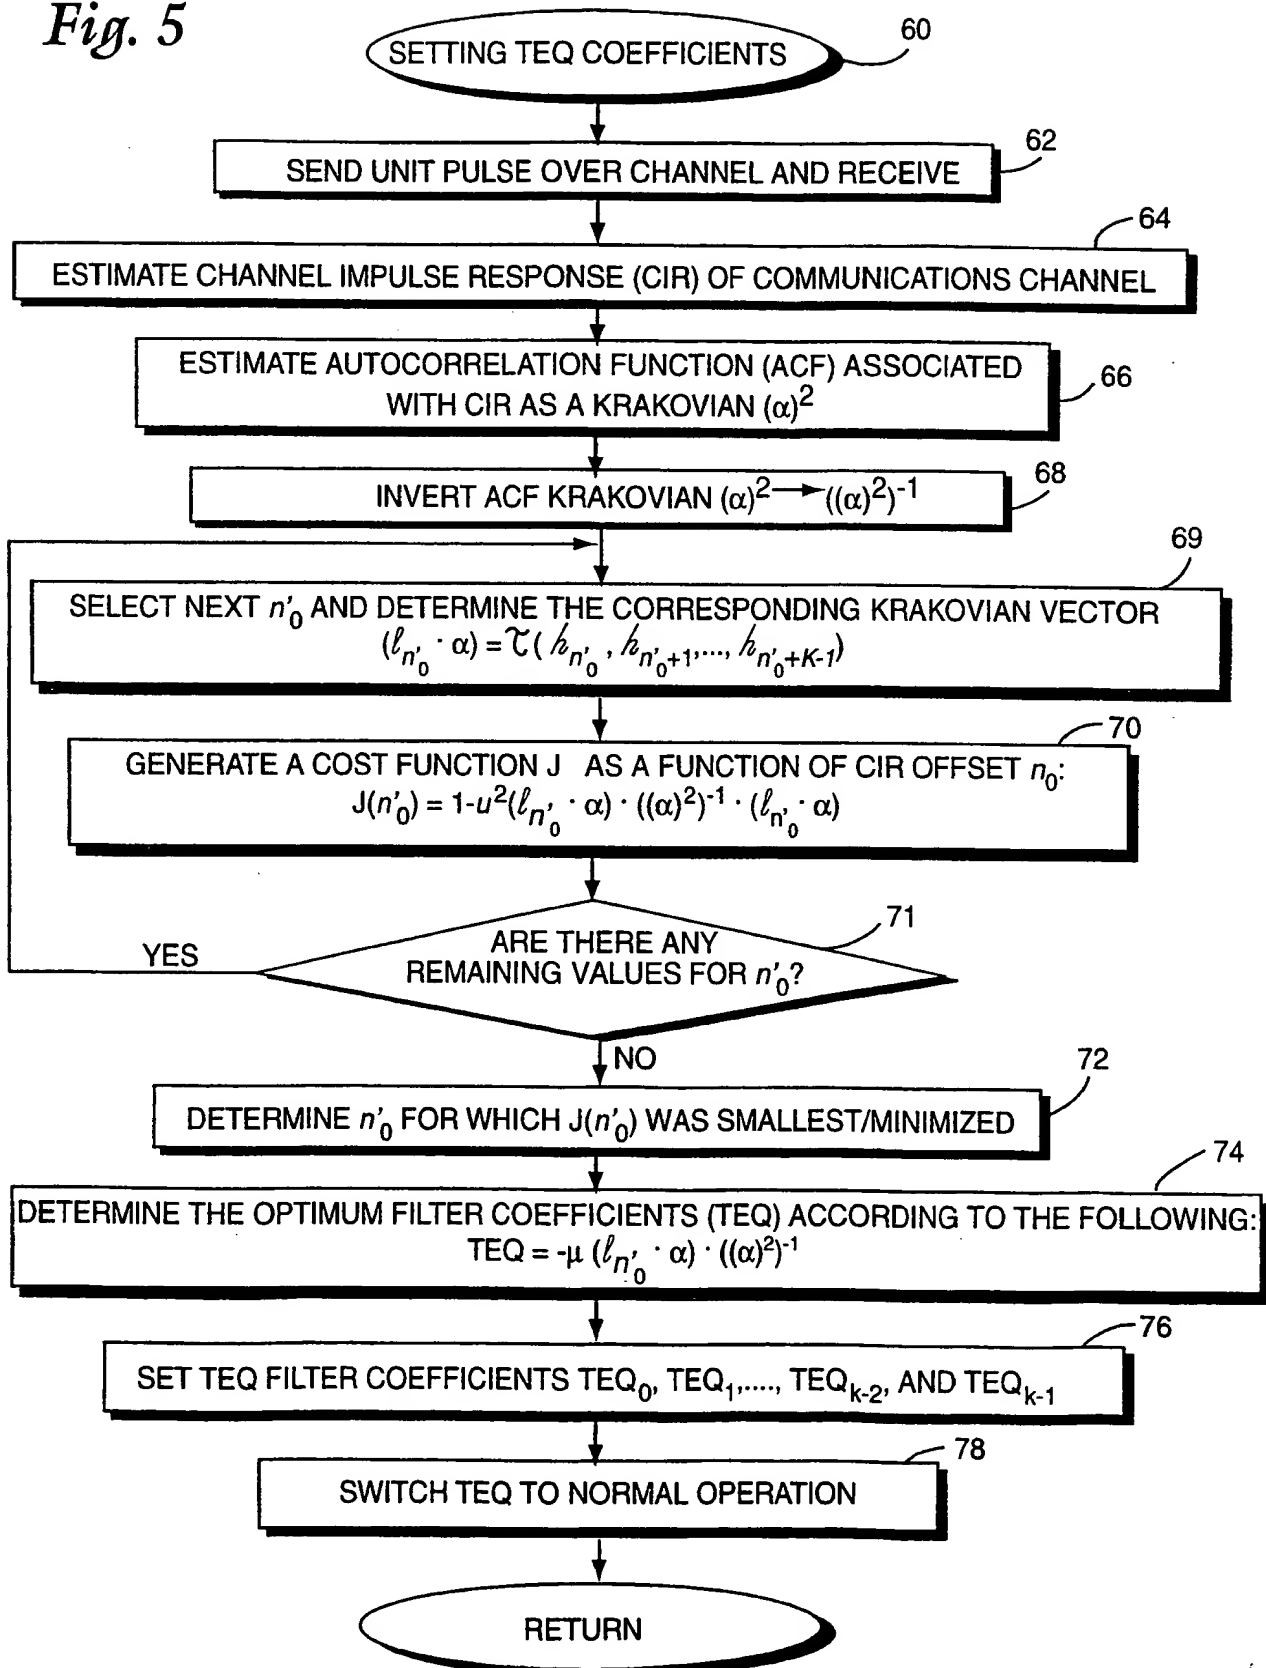

6/7

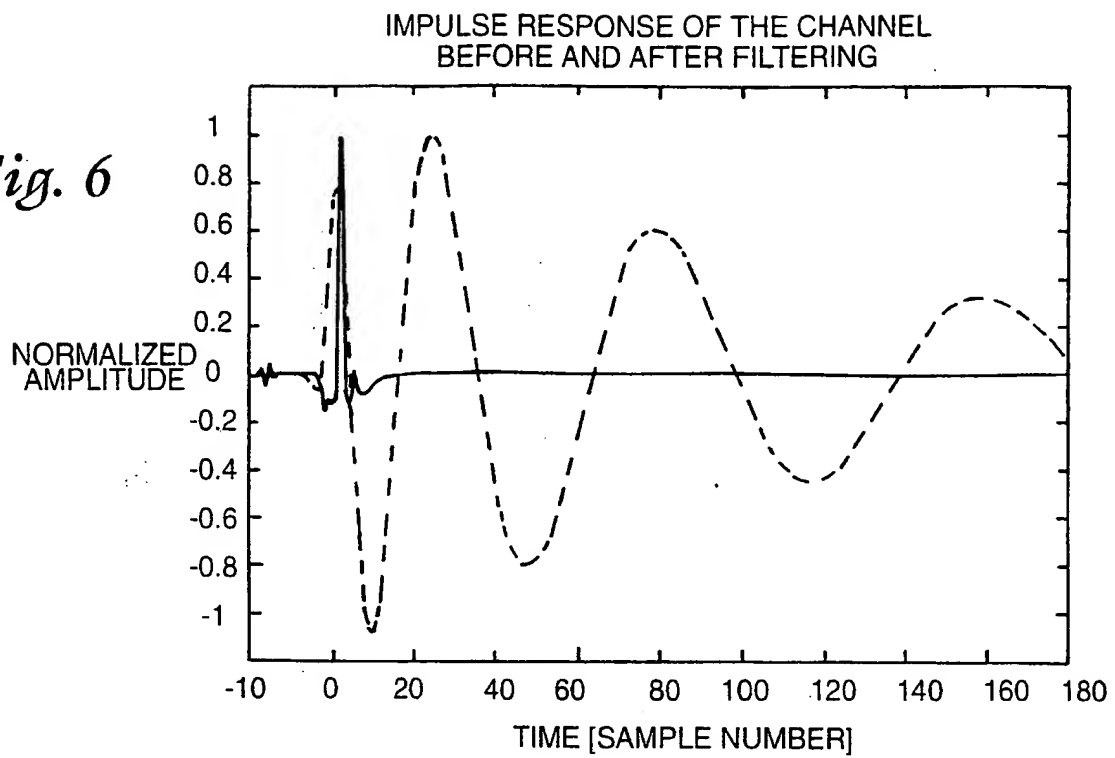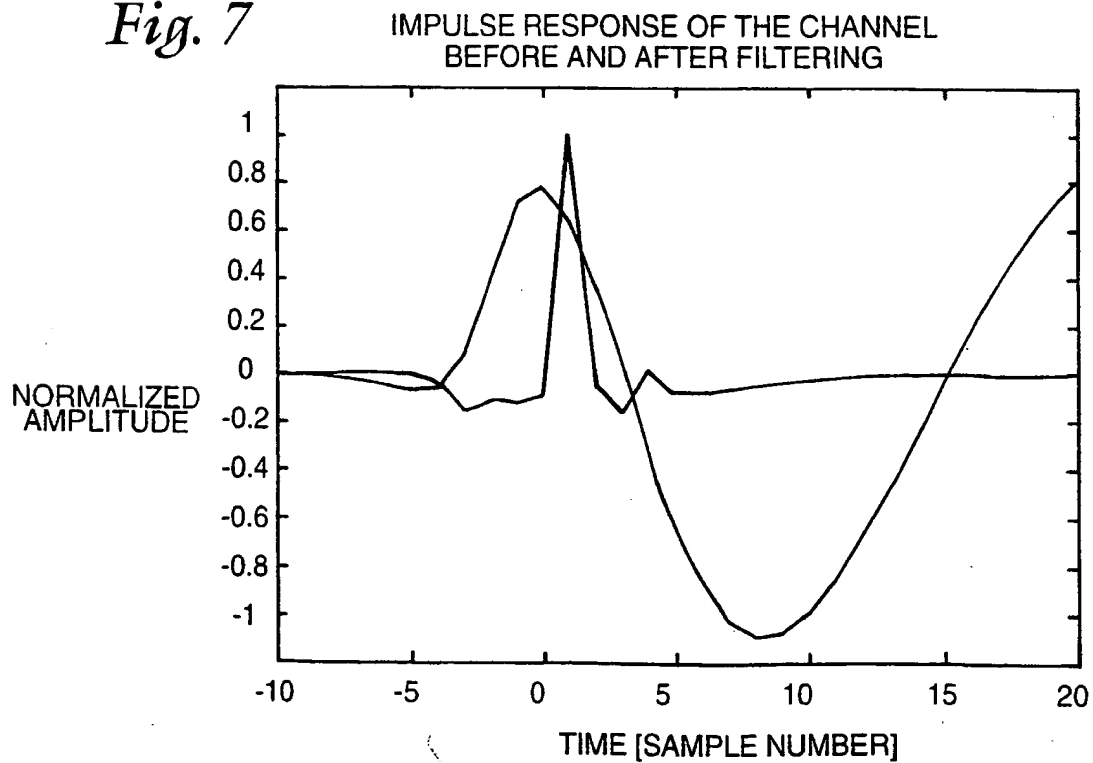*Fig. 6**Fig. 7*

7/7

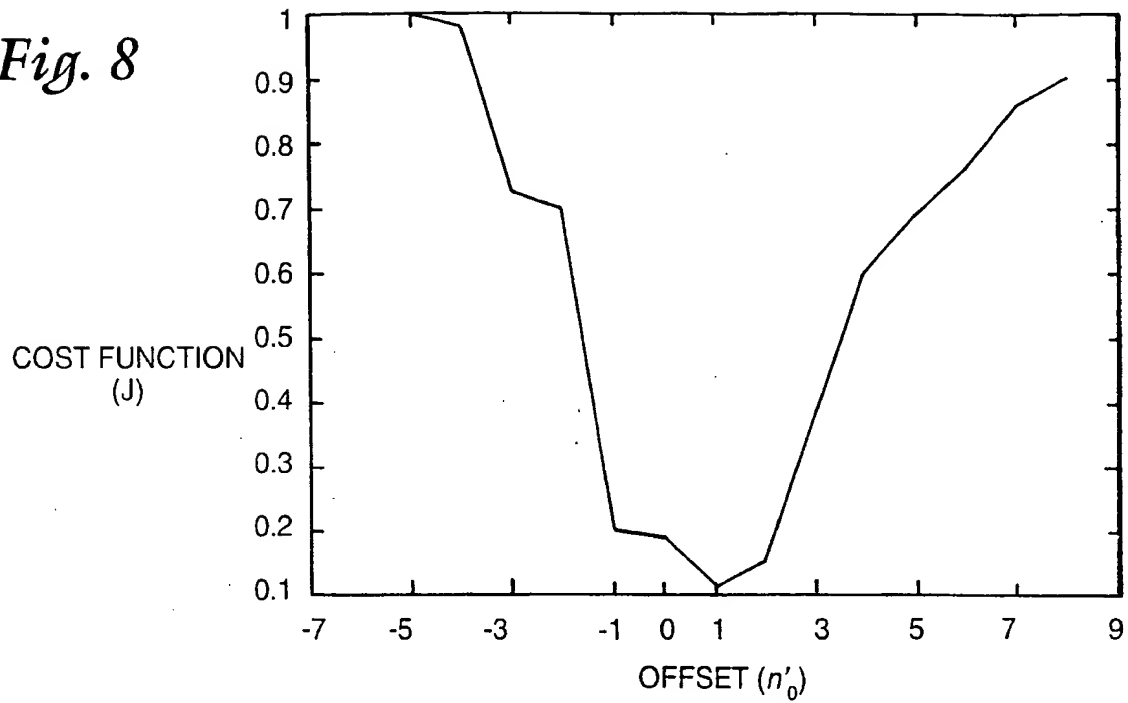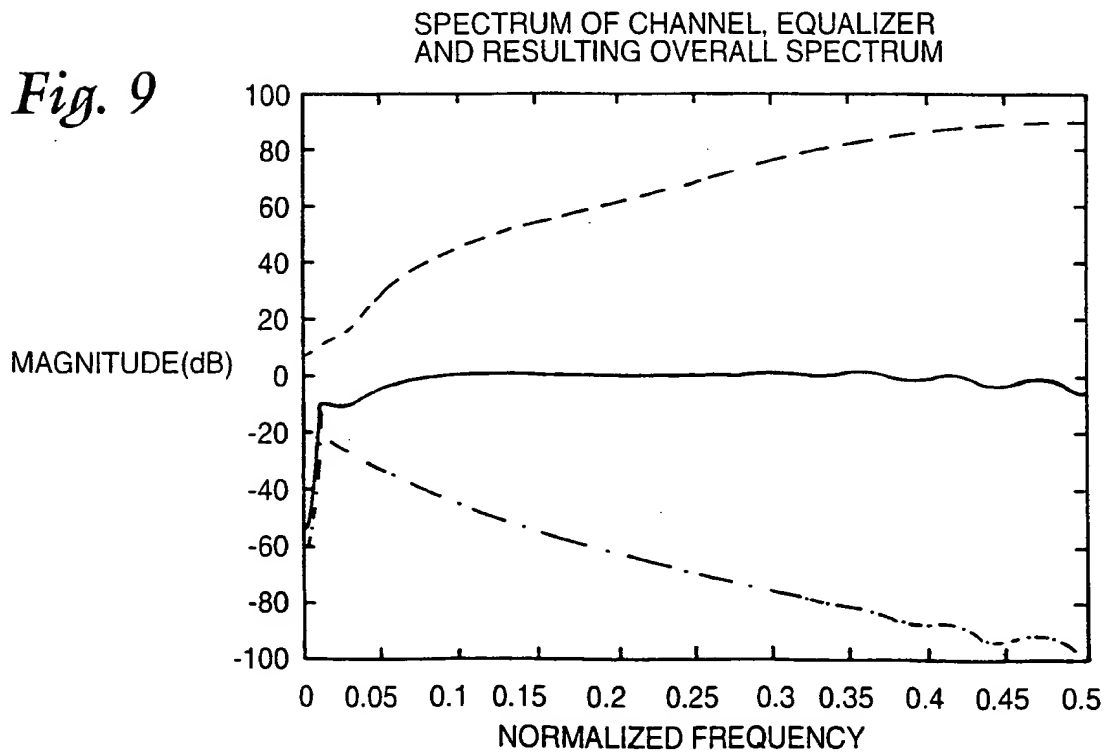*Fig. 8**Fig. 9*

**THIS PAGE BLANK (USPTO)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :

H04L 25/03, 27/26, 25/02

A3

(11) International Publication Number:

WO 99/50969

(43) International Publication Date:

7 October 1999 (07.10.99)

(21) International Application Number: PCT/SE99/00468

(22) International Filing Date: 24 March 1999 (24.03.99)

(30) Priority Data:

09/049,384

27 March 1998 (27.03.98)

US

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON  
[SE/SE]; S-126 25 Stockholm (SE).(72) Inventor: FERTNER, Antoni; Kruthusbacken 76, 1 tr, S-169  
52 Solna (SE).(74) Agents: BERG, S., A. et al.; Albihts Patentbyrå Stockholm  
AB, P.O. Box 5581, S-114 85 Stockholm (SE).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

## Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.


(88) Date of publication of the international search report:

13 January 2000 (13.01.00)

(54) Title: EQUALIZER, USING KRAKOVIAN ALGEBRA, FOR MULTICARRIER TRANSMISSION

## (57) Abstract

The present invention provides an optimal procedure for determining in the time domain equalizer coefficients for an equalizer, where the equalizer compensates for the effects of the communications channel on the transmitted signal. A unit pulse is transmitted over the communications channel, and a channel impulse response is estimated from the received signal. A cost function establishes a mean-square error associated with the estimated channel impulse response as compared to a desired impulse response signal. The value of the cost function varies based upon an offset value between the estimated channel impulse response and an equalized channel impulse response. Values of the cost function are determined for different offsets, and the offset that produces the smallest cost function value (corresponding to the minimum mean-square error) is selected. The optimal equalizer coefficients are then calculated using the selected offset and the established cost function. In a preferred embodiment, the invention is applied to multicarrier modulation systems. Moreover, the cost function is defined as a krakovian function that depends on the offset value. That krakovian function includes a first krakovian which uses the channel impulse response and a second krakovian which uses the autocorrelation of the channel impulse response. Using the first and second krakovians and the selected offset corresponding to the minimal value of the established cost function, the optimal equalizer coefficients are determined in a straightforward, one step calculation.

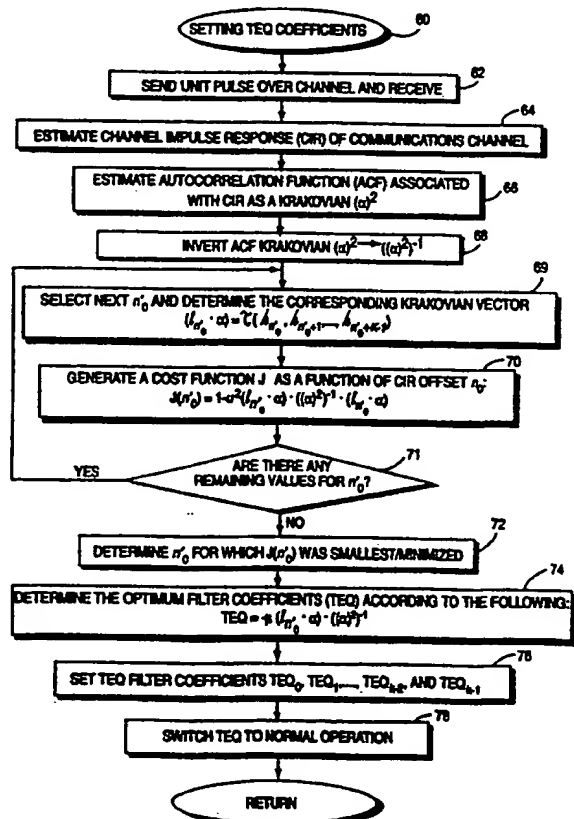

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 99/00468

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04L25/03 H04L27/26 H04L25/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 097 723 A (FUJITSU) 11 January 1984 (1984-01-11) page 3, line 2 - line 35 page 4, line 6 - line 22 page 5, line 20 -page 6, line 15 ---	1,2,6
X	US 4 047 013 A (MILEWSKI) 6 September 1977 (1977-09-06) column 1, line 40 - line 52 column 2, line 65 - line 68 column 3, line 32 - line 44 column 12, line 7 - line 21 ---	1,2
Y	---	6
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

12 November 1999

Date of mailing of the international search report

25. 11. 1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Scriven, P

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/SE 99/00468

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 285 480 A (PARKER) 8 February 1994 (1994-02-08) column 3, line 55 - line 60 column 3, line 63 - column 4, line 1 column 7, line 5 - line 6 ---	1
X	EP 0 682 414 A (OKI ELECTRIC INDUSTRY) 15 November 1995 (1995-11-15) page 11, line 13 - line 21 ---	1
X	FERTNER: "Application of Krakovian calculus to adaptive digital filtering" NUCLEAR INSTRUMENTS AND METHODS, vol. 201, no. 2-3, 15 October 1982 (1982-10-15), pages 421-427, XP002079089 NL section 1 section 4	8-16
A	---	7, 18, 21, 22
X	EP 0 793 369 A (TOGNETTI) 3 September 1997 (1997-09-03) page 2, line 14 - line 16 page 8, line 1 - line 5 claim 1	17
Y	---	6
A	ARNON: "An adaptive equalizer for television channels" IEEE TRANSACTIONS ON COMMUNICATION TECHNOLOGY., vol. 17, no. 6, December 1969 (1969-12), pages 726-734, XP002079180 NEW YORK, US page 727, right-hand column, paragraph 2 page 728, right-hand column, paragraph 2 ---	1-6
A	EP 0 052 362 A (NEC) 26 May 1982 (1982-05-26) page 3, line 1 - line 3 page 3, line 7 - line 9 page 11, line 2 - line 11 page 13, line 6 - line 11 ---	1
A	WO 93 26096 A (LELAND STANFORD JUNIOR UNIVERSITY) 23 December 1993 (1993-12-23) page 3, line 30 - line 35 page 9, line 19 - line 29 claim 1 ----- -/--	1

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 99/00468

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 962 637 A (MOTLEY, CHENG) 8 June 1976 (1976-06-08) column 2, line 24 - line 25 column 2, line 46 - line 48 column 2, line 55 - line 57 -----	1
A	EP 0 204 308 A (FUJITSU) 10 December 1986 (1986-12-10) -----	6

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/SE 99/00468

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4.

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

**FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210**

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-5 17-22

Convergence to a target channel impulse response

2. Claim : 6

Estimation of channel impulse response

3. Claims: 7-16

Efficient computation using Krakovian algebra

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 99/00468

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0097723	A	11-01-1984	JP 1008498 B	14-02-1989
			JP 1521157 C	29-09-1989
			JP 58121838 A	20-07-1983
			AU 546024 B	08-08-1985
			DE 3278305 A	05-05-1988
			WO 8302373 A	07-07-1983
			US 4571733 A	18-02-1986
US 4047013	A	06-09-1977	JP 1047699 C	28-05-1981
			JP 52017709 A	09-02-1977
			JP 55041571 B	24-10-1980
US 5285480	A	08-02-1994	CA 2076084 A	04-03-1993
EP 0682414	A	15-11-1995	FI 953461 A	25-09-1995
			WO 9515034 A	01-06-1995
			JP 2786335 B	13-08-1998
EP 0793369	A	03-09-1997	IT T0950889 A	05-05-1997
EP 0052362	A	26-05-1982	JP 1508176 C	26-07-1989
			JP 57084632 A	27-05-1982
			JP 63052818 B	20-10-1988
			JP 1030333 B	19-06-1989
			JP 1555062 C	23-04-1990
			JP 57097736 A	17-06-1982
			BR 8107464 A	10-08-1982
			CA 1171470 A	24-07-1984
			US 4430743 A	07-02-1984
WO 9326096	A	23-12-1993	US 5285474 A	08-02-1994
			AU 4411393 A	04-01-1994
US 3962637	A	08-06-1976	GB 1505139 A	22-03-1978
EP 0204308	A	10-12-1986	JP 1893309 C	26-12-1994
			JP 6014627 B	23-02-1994
			JP 61278219 A	09-12-1986
			AU 567637 B	26-11-1987
			AU 5824886 A	08-01-1987
			CA 1246260 A	06-12-1988
			DE 3689292 D	23-12-1993
			DE 3689292 T	03-03-1994
			US 4868850 A	19-09-1989